

Schall-Ex® L-15/30 WS

DETAILS

Articlenumber	1-880
Function	hinged door
Türenmaterial	timber, metal
Application	internal door
Usage	sound protection, smoke protection, fire protection, accessibility

TECHNICAL DATA


Width	14.8 mm
Height	30 mm
Min. delivery length	235 mm
Max. delivery length	2000 mm
Standard length	708, 833, 958, 1083, 1208 mm
max. travel	20 mm
Actuation	single-sided
Actuator	sliding acuator
removableInner profile	yes
Outerprofile	aluminium
Surface	plate finish
Sealingprofile	silicone, self-extinguishing

FITTING

Fixing	WS - Winkel-Schrauben Spanlattenschraube 3x16
Pressureplate	-
Espagnolette bolt	yes

EXAMINATIONS AND CERTIFICATES

Sound	yes
Permanent function 1M	yes
Mio Certificate	yes
Leakage rate certificate	yes
Corrision test	yes

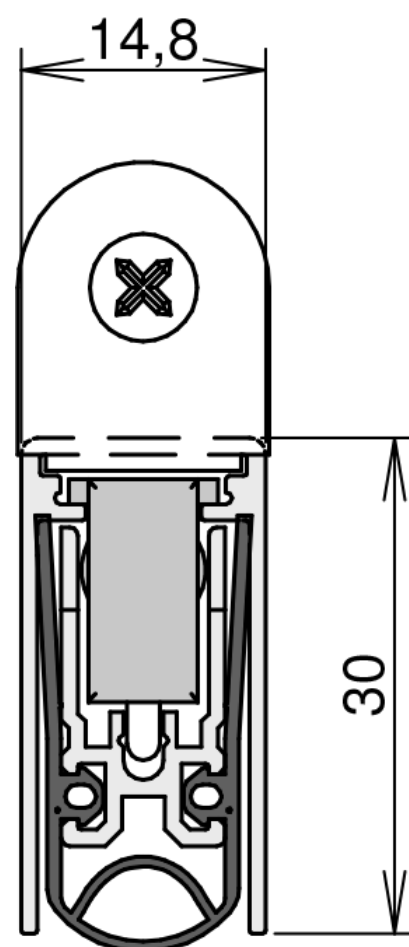

Schall-Ex® L-15/30 WS

Corrision	yes
Barrier free	yes
UL	yes
EPD	yes
REACH	yes
Certifire	yes

