

Stadi L-20/20 WS

DETAILS

Articlenumber	1-939
Function	hinged door
Türenmaterial	timber, metal, PVC
Application	exterior door, internal door
Usage	sound protection, smoke protection, fire protection, accessibility

TECHNICAL DATA



Width	20 mm
Height	20 mm
Min. delivery length	230 mm
Max. delivery length	2000 mm
Standard length	750, 900, 1050, 1200 mm
max. travel	16 mm
Actuation	single-sided
Actuator	sliding acuator
Outerprofile	aluminium
Surface	plate finish
Sealingprofile	silicone, self-extinguishing

FITTING

Fixing	WS - Winkel-Schrauben Spanplattenschraube 3x16 Edelstahl
Pressureplate	stainless steel
Espagnolette bolt	yes

EXAMINATIONS AND CERTIFICATES

Sound	yes
Permanent function IM	yes
Mio Certificate	yes
Leakage rate certificate	yes
Corrision test	yes
Corrision	yes

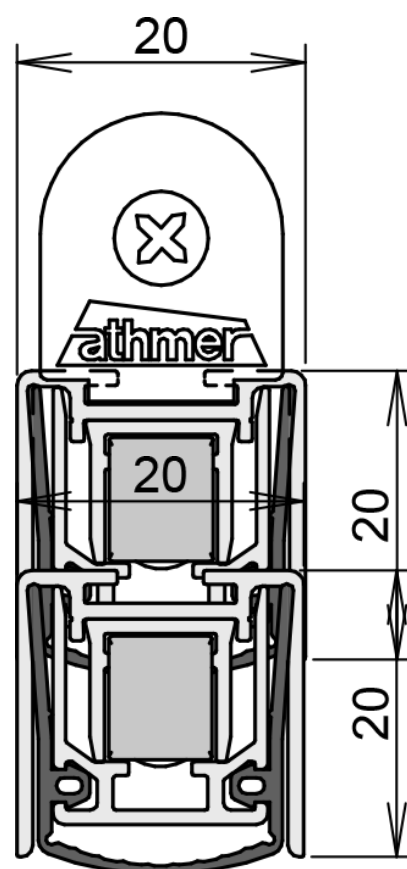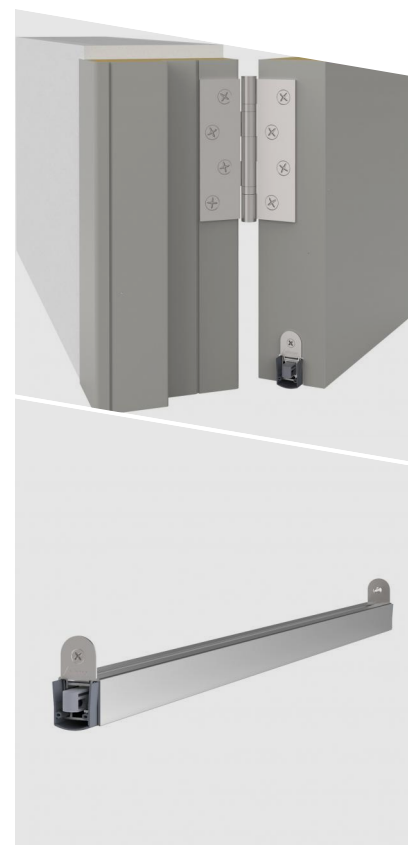

Stadi L-20/20 WS

Barrier free yes

UL yes

EPD yes

REACH yes

Certifire yes

