

Routing jig BAKA Protect 4000 door

for door part routing BAKA Protect 4000



Notes

Fitting instructions

1. Clamp routing jig to workpiece, insert template and rout first slot with cutter $\varnothing 20,0$ mm (collar ring $\varnothing 30,0$ mm).
2. After routing, loosen quick-release clamp and remove routing jig.

Scope of supply


- 1 x routing jig
- 1 x template BAKA Protect 4000 door 20/30
- 1 x template BAKA Protect 4000 FD door 20/30
- 1 x fitting instruction

Note

Templates for the following combinations (cutter/collar ring) are also available as accessories:

- template BAKA Protect 4000 door 16/27
- template BAKA Protect 4000 door 16/30
- template BAKA Protect 4000 door 20/27

Also available as ball catch location routing jig BAKA Protect 4000 leaf.

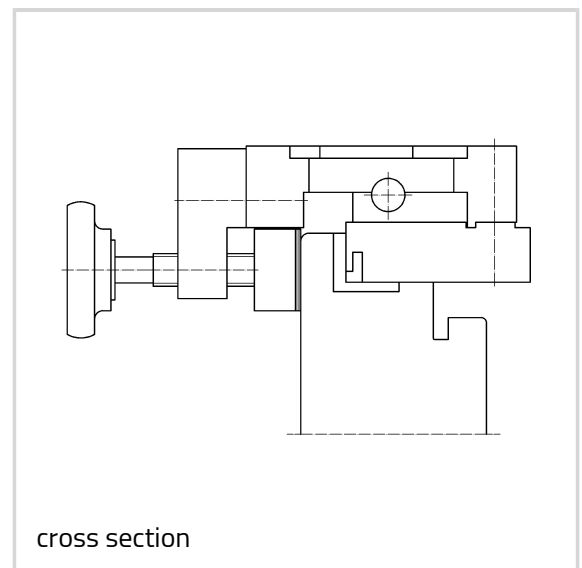

datasheet.headline.forApplications

BAKA Protect 4010 3D

BAKA Protect 4010 3D FD

Routing jig BAKA Protect 4000 door

BAKA Protect 4020 3D
BAKA Protect 4020 3D FD
BAKA Protect 4030 3D FD
BAKA Protect 4040 3D FD
BAKA Protect 4048 3D K
BAKA Protect 4060 3D FD

Combinations

Expansion set BAKA Protect 4048 3D K

Item versions

Finish	without (000)
OF-No.	000
VPE	pack of 1
DIN	DIN right and left hand
Article number	5 251042 0 00001
EAN	4015471105945